




Box 459 - Rosemount, MN 55068  
Phone 800-328-0953  
Fax 800-334-8823

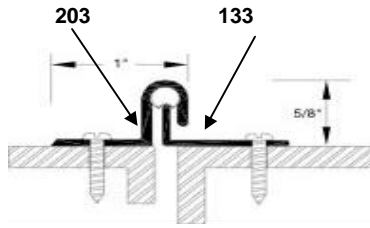

### Astragal Part # 203 with 133

This weather strip is designed to fill the space between double doors. Spacing between the doors should be 1/16" minimum to 3/16" maximum.

1. Measure the height of door and cut the piece of astragal to equal the height.
2. Fasten the astragals to the face of the doors with screws furnished. The housing should be flush with the edge of the doors as illustrated above.
3. Operate the door several times to ensure the gasketing material is adjusted properly so as not to inhibit the door from self-closing and latching.



Positive Pressure Tested Gasketing Materials for Fire Doors. Intended for Application to/with listed steel frames and/or classified steel covered composite, hollow metal type fire doors rated up to 3 hours, wood and plastic covered composite type fire doors rated up to 1-1/2 hours, and wood core type fire doors rated up to 20 minutes. Also Classified in accordance with UBC 7-2, Fire Tests of Door Assemblies(1997). Meets UL10B, UL10C, UL1784, UBC 7-2 (1997) Category J UBC 7-2(1997)part 2 Category H Can use on 'S' Labeled doors.



17L5