




Box 459 - Rosemount, MN 55068
Phone 800-328-0953
Fax 800-334-8823

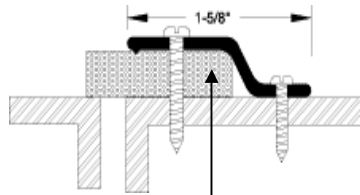

Sponge Neoprene

Astragal Part # 93

This weather strip is designed to fill the space between the meeting stiles of double doors.

1. Measure the height of door and cut the piece of astragal to equal the height.
2. Fasten the astragal to the face of the active door with the neoprene overlapping the spacing between the doors so as not to interfere with self-closing devices, locks or other door hardware.
3. Operate the door several times to ensure the gasketing material is adjusted properly so as not to inhibit the door from self-closing and latching.



Positive Pressure Tested Gasketing Materials for Fire Doors. Intended for Application to/with listed steel frames and/or classified steel covered composite, hollow metal type fire doors rated up to 3 hours, wood and plastic covered composite type fire doors rated up to 1-1/2 hours, and wood core type fire doors rated up to 20 minutes. Also Classified in accordance with UBC 7-2, Fire Tests of Door Assemblies(1997). Meets UL10B, UL10C, UL1784, UBC 7-2 (1997) Category J UBC 7-2(1997)part 2 Category H Can use on 'S' Labeled doors.



17L5